

OTL 50-3



OTL 95-3



OTL 150-3



OTL 300-3

Grey	●	MAA3050A10	MAA3095A10	MAA3150A10	MAA3300A10
Blue	●	MAA3050B10	MAA3095B10	MAA3150B10	MAA3300B10
Yellow-green	●	MAA3050Y10	MAA3095Y10	MAA3150Y10	MAA3300Y10
Red	●	MAA3050R10	MAA3095R10	MAA3150R10	MAA3300R10
Black	●	MAA3050S10	MAA3095S10	MAA3150S10	MAA3300S10


Technical data

Conductor cross-section Cu, Al (mm ²)		1.5 - 50	6 - 95	25 - 150	95 - 300
Nominal voltage AC / DC (V)		1000 / 1500	1000 / 1500	1000 / 1500	1000 / 1500
Nominal voltage AC / DC (V)		1000	1000	1000	1000
Nominal current (A)		320 (Cu) / 290 (Al)	490 (Cu) / 440 (Al)	640 (Cu) / 500 (Al)	630 (Cu) / 630 (Al)
Nominal current (A)		150 (Cu) / 120 (Al)	230 (Cu) / 180 (Al)	285 (Cu) / 250 (Al)	-
Width / Height / Length (mm)		46 / 41 / 80	59 / 51 / 84	71 / 54 / 84	101 / 78 / 120
Screw, hexagonal key		No. 5	No. 6	No. 6	No. 8
Tightening torque (Nm)		1,5 Nm (1,5 - 2,5 mm ²) 5 Nm (4 - 10 mm ²) 10 Nm (16 - 50 mm ²)	12 Nm (6 - 25 mm ²) 22 Nm (35 - 95 mm ²) -	14 Nm (25 - 50 mm ²) 30 Nm (70 - 150 mm ²) -	35 Nm (95 - 150 mm ²) 45 Nm (180 - 300 mm ²) -
Mounting		DIN rail, screw	DIN rail, screw	DIN rail, screw	DIN rail, screw
Weight (g)		109	178	246	730
Package (pcs)		20	6	6	1


* Currents achievable by connecting multiple input cables.

Dimensions


OTL 50-3

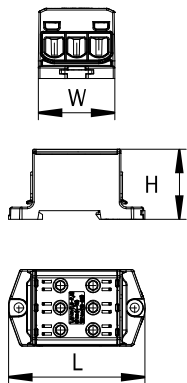

OTL 95-3

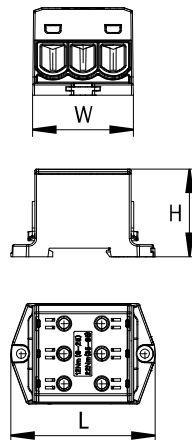

OTL 150-3

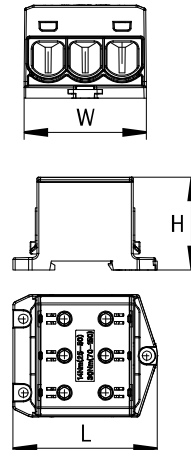

OTL 300-3

