



push-in terminal block 2 levels feed-through, 4mm<sup>2</sup>, grey



Series	EFD
Code	EFD400GR
Type	EFD.4/GR
Colour	Grey
<b>TECHNICAL FEATURES</b>	
Function/Type	2 levels feed-through
Rated cross-section	4 mm <sup>2</sup>
Connecting capacity	
Flexible wire	0.2-6 mm <sup>2</sup>
Rigid wire	0.2-6 mm <sup>2</sup>
Wire with ferrule - ferrule type	4 mm <sup>2</sup> - WP40/16
<b>Electrical characteristics according to IEC EN standard</b>	
Maximum voltage AC/DC	800 V
Maximum current (rated cross-section)	29 A
Caliber	A4
<b>Electrical characteristics according to UL Standard</b>	
Maximum voltage AC/DC	600 V
Maximum current (rated cross-section)	30 A
Section (min-max)	24-10 (AWG)
<b>Electrical characteristics according to ATEX directive and IEC Ex standard</b>	
Maximum voltage AC/DC	500 V
Maximum current (rated cross-section)	25 A
Operating temperature Min/Max	-40 °C / +110 °C
Rated impulse withstand voltage / pollution degree	6 kV / 3
Insulation stripping length	10 mm
Width (pitch)	6.2 mm
Length	81.7 mm
Height mounted on TH35-7.5/TH35-15/G32	57.7 / 65.2 / - mm
Insulation material temperature index (EN 60216-1)	130 °C
Plastic material	Polyamide UL94V-0
<b>ACCESSORIES</b>	
<b>End section</b>	
Grey	EFD.4/PT/GR (cod. EFD401GR)
Blue	EFD.4/PT/BL (cod. EFD401BL)
Thickness	1.5 mm
Cross-connection	EFB.4/.../... (cod. EFB04...)
Rated current carrying capacity IEC/ATEX	29 A / 25 A
Coloured partition plate	DFE.2P/R (cod. DFE04R)
<b>Marking</b>	
Adhesive numbering strip	-
Snap-on numbering strip	-
Single marking tag	CNU/10/51 (cod. NU1051S)
Single marking tag for pitch insertion	CNU/10/51 (cod. NU1051S)
<b>End bracket</b>	
TH35 screw type	BT/3 (cod. BT003)
TH35 snap-fit type	BTO (cod. BT007)
TH35 and G32 snap-fit type	BTU (cod. BT005)
DIN rail according to IEC 60715/TH35	PR/3/..
APPROVALS AND MARKINGS	

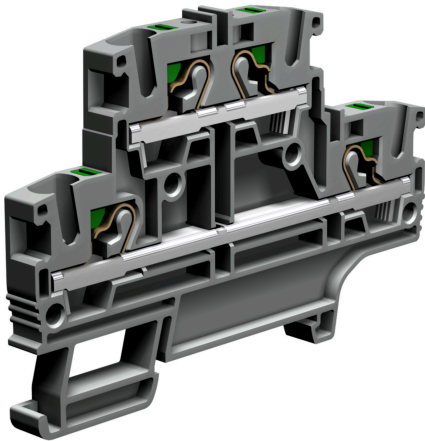